

# Degeleman

# AUSTRALIA



 **MUDDY RIVER**



FOLLOW US ON YOUR  
FAVOURITE SOCIAL MEDIA  
POINT YOUR CAMERA HERE



**NATIONAL SALES**  
**MARK TOSSWILL**  
0408 604 546  
MTOSSWILL@MUDDYRIVER.COM.AU

**QUEENSLAND**  
44 EUSTON ROAD  
TOOWOOMBA  
07 4580 0825

**VICTORIA**  
9 HUGGARD DVE  
MOOROPNA

**WESTERN AUSTRALIA**  
32 EWING ST  
BENTLEY

**BUILD IT TOUGH,  
BUILD IT HEAVY,  
BUILD IT TO LAST,  
FROM TOP TO BOTTOM.**

- Wilf Degelman



## ENGINEERED TOUGH

Wilf Degelman started Degelman Industries over 60 years ago with one thing in mind. He wanted to make products that had a true impact on the farm. Wilf was raised on farm values, not business values. He believed in honesty, being upfront, and was always interested in what farmers were doing and where they thought the industry was headed. He understood the costs associated with farming and set out to make practical equipment that would make seeding and harvesting easier.

In 1962 Wilf Degelman built a heavy duty rock picker, the product that started it all, out of his barn in Raymore, SK. Fast forward to today, and we still build all Degelman products with his philosophy in mind; "The fewer number of parts and complexity the better - and when you build something, build it right, build it heavy and build it to last - from top to bottom."

We focus on support and make the experience of owning a Degelman unlike any other. We are a well established company, with deep roots in the agricultural industry. We take exceptional pride in what we do, and manufacture every piece of equipment with extreme focus and care. We go above and beyond, like the marks you'll find on our equipment to show the torque has been done right, and creating easy to follow quick-start manuals, so you're ready to roll on a Sunday morning. We make all of our products with the farmer's needs in mind.

Over the last 6 decades, there have been great advances in technology, but the foundation of Degelman remains the same: build simple, heavy, reliable equipment, that will last for generations. We choose to innovate rather than imitate, and work hard to remain an industry leader. Wilf truly said it best: "Build it right, build it heavy and build it to last - from top to bottom".


Degelman. Engineered Tough.





**1970**  
Dozer King

**1990**  
6900 Series  
Bulldozer Blade



**1992**  
Landroller

**1962**  
Flotation Hi-Lift  
Rock Picker

**1984**  
Super Picker



**2002**  
Mowing Equipment



**1993**  
Strawmaster

**2010**  
Manure Spreaders

**1996**  
Signature 7200  
Series Rock Picker



**2004**  
7900 Series



**2020/21**  
Strawmaster + & Strawmaster X

**2013**  
Pro-Till

**2021**  
Pro-Cast

**2019**  
Silage King

**2018**  
Rock King



Scan to view a comprehensive list of our product releases throughout the year



**Degelman**

**Muddy River**



# TRUE GREASELESS TECHNOLOGY

Put away the grease gun. We know the window for spring and fall work is quick and unforgiving. Give yourself the upper hand with Degelman's game changing True Greaseless Technology.

Farming operations are becoming bigger and more complicated every day. We know time is money, and that today's growers have more to worry about than greasing their equipment. We have invested time and money, and are committed to bringing True Greaseless Technology to all products we develop. Any product name with the TGT marking on it, features our industry leading True Greaseless Technology.



## Pin Eye Cylinders

The welded pin eye cylinder series is designed to withstand the most demanding applications on the market today. Lion's extensive design experience has resulted in a premium rephasing cylinder with the latest in sealing and rephasing technology and standard Lion 1000 induction hardened rods for the ultimate in corrosion protection and durability.




**Degelman**

**Muddy River**


## Exclusive Self-Lubricated, Zero-Maintenance Bushings

No metal on metal contact with our state of the art bushings. These bushings, manufactured from a friction liner applied on a glass fiber structure, have excellent friction properties and improved wear resistance without external lubrication even on high loads.

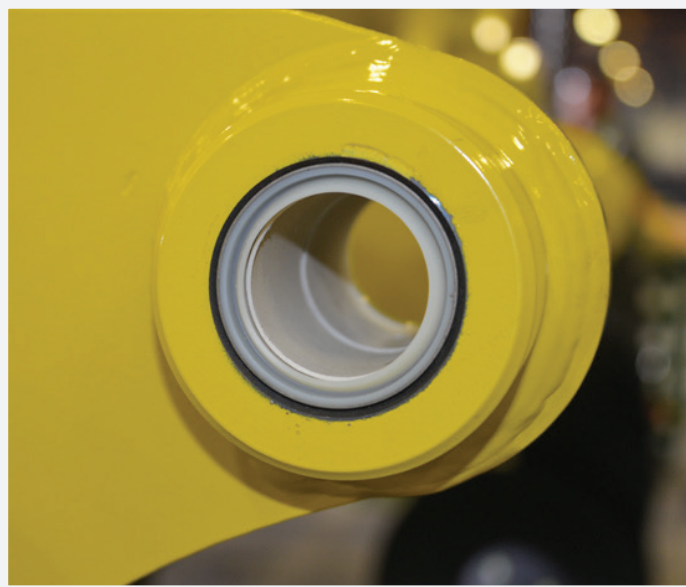


## Bushing Seal

The wiper edge removes even the toughest dirt and contaminants from the pin, keeping the system running clean and at its peak performance. The metal enclosure ensures a secure fit in the open housing, preventing expulsion of the wiper even under extreme conditions.

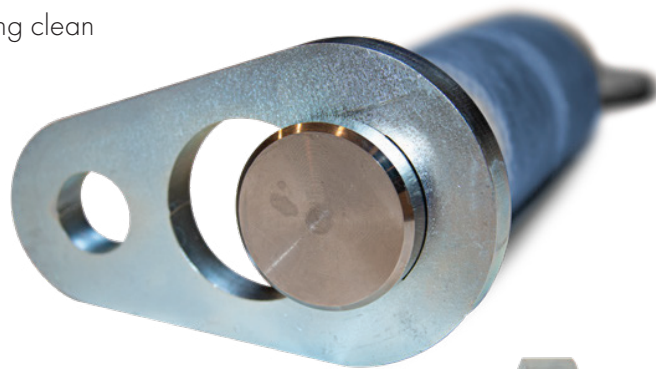

## Oversized Electroless Plated Nickel Pin

At 5.08 - 6.35 cm in diameter, these high tensile steel pins are 60% larger than any other pin on the market. With the robust weld free pin design, you don't have to worry about a weld breaking and stopping you from getting your work done.

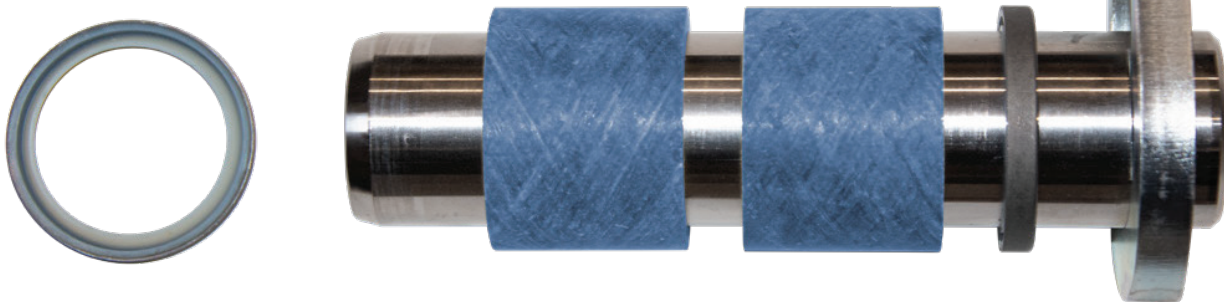

# PRO-TILL

## High Performance Tillage

This is Pro-Till by Degelman. The fastest and most versatile piece of tillage equipment you will ever own. Pro-Till shreds heavy fall residue, opens up spring fields, levels ruts, destroys clods and produces an absolutely perfect seed bed. Pro-Till is High Speed, High Performance Tillage.



### Horsepower Requirements for All Sizes

- 12 to 15 hp per foot at **5.08 cm or less working depth** to achieve 12 -19 km/h with 50.8 cm blades (will vary by soil type)
- 15 to 20 hp per foot at **5.08 cm or more working depth** to achieve 12 -19 km/h with 50.8 cm blades (will vary by soil type)

#### Horsepower Per Foot

Pro-Till Model	Horsepower Per Foot			✓
	12hp	15hp	20hp	
10'	200	250	300	✓
13'	260	325	390	✓
14' NT	170	210	280	✓
17' NT	200	250	350	✓
20'/20'NT	250	300	400	✓
26'	300	400	500	✓
30'	360	450	600	✓
36'	450	550	600	✓
40'	500	600	600+	
41'	500	600	600+	✓
45'	550	600+	600+	✓



**Degelman**


**Muddy River**

# PULLED AT SPEEDS OVER 16 km/h

The Pro-Till shreds residue at speeds over 16 km/h, up to three times the speed of traditional cultivators, while ensuring uniform distribution of residue to eliminate problems such as uneven and delayed emergence, hair pinning, erosion and seeder/planter plugging.




## EXCLUSIVE OPTIONS



**Double V Disc**

The Double V Notch blade does the job of slicing & penetrating in hard soils, cutting straw & residue, and providing traction to keep the blades rotating. The result is a smoother furrow bottom compared to the more conventional U notch blade.



**Max Life Scrapers**

With up to 10 times longer wear than standard scrapers, Max Life scrapers take advantage of new hard surfacing technology. Tungsten carbide is mixed directly into the molten weld bead.

**Rubber Otico Roller**




Excellent all-around packer with a unique corrugated ridge profile, which leaves a field finish designed to manage moisture and prevent soil erosion.

**LSTXE Roller**



The Exclusive LSTXE Rubber Furrow roller includes state of the art features that excel in sandy and wet conditions.

**Other Options**




**Notched Disc**



**Smooth Disc**



**9 or 12 bar Cage Roller**



**WATCH THE VIDEOS ON**



# PRO-TILL<sup>®</sup> | 10/13

HIGH PERFORMANCE TILLAGE



\*\*\* Ensuring the tractor's 3-point hitch can hold the pro-till is critical for safety, and will often be more limiting than the tractor's hydraulic output or horsepower rating.

**NOTE: Requires Cat 3 or Cat 4 - 3 point and good amount of front weight ballast to operate.**

## SPECIFICATIONS

Model	PT10	PT13
Working Width	10' (3 m)	14' (4 m)
Transport Width	3.5 m	4.5 m
Weight	See Weight Chart	See Weight Chart
Lift Weight***	See Weight Chart	See Weight Chart
Number Of Discs	24	32

## WEIGHT CHART

Model	ROLLER TYPE	ACTUAL WEIGHT	LIFT WEIGHT
PT10	Rubber + scrapers	2,426 kg	4,222 kg
	Cage roller (9-bar)	2,295 kg	3,719 kg
	Cage roller (12-bar)	2,381 kg	4,000 kg
PT13	Rubber + scrapers	3,197 kg	5,837 kg
	Cage roller (9-bar)	2,875 kg	4,667 kg
	Cage roller (12-bar)	2,984 kg	5,034 kg

# PRO-TILL<sup>®</sup> | 14/17/20

HIGH PERFORMANCE TILLAGE



Model	PT14NT	PT17NT
Width Available	14' (4 m)	17' (5 m)
Transport Width	3 m	3 m
Weight	13,160 lbs (5,970 kg)	14,740 lbs (6,685 kg)
Hitch Weight	3,505 lbs (1,590 kg)	4,315 lbs (1,957 kg)
Number of Discs (per-wing)	15	19

Model	PT20NT
Width Available	20' (6m)
Transport Width	3 m
Weight	16,320 lbs (7,403 kg)
Hitch Weight	5,020 lbs (2,277 kg)
Number of Discs (per-wing)	23

# PRO-TILL<sup>®</sup> | 20/26

HIGH PERFORMANCE TILLAGE



Model	PT20	PT26
Width Available	20' (6 m)	26' (8 m)
Transport Width	4.2 m	4.2 m
Weight (including gauge wheels)	20,080 lbs (9,110 kg)	23,480 lbs (10,650 kg)
Hitch Weight	5,200 lbs (2,360 kg)	6,510 lbs (2,952 kg)
Number of Discs(per-wing)	23	31

**Degelman**

**Muddy River**



# PRO-TILL<sup>®</sup> | 40

HIGH PERFORMANCE TILLAGE



## The Original Monster

With the Pro-Till 12 m machine, Degelman Industries pioneered the trend of a “North American High Performance Disc”. We took European technology and added weight where it was needed, simplicity where it made sense, and performance where it mattered, so it could withstand the acres and punishment that farmers across North America demand. There is still nothing heavier and better built on the market. The Pro-Till 40 is undeniably Degelman.

## SPECIFICATIONS

Model	PT40
Width Available	40' (12 m)
Transport Width	20' (6 m)
Weight	34,560 lbs (15,680 kg)
Hitch Weight	8,500 lbs (3,855 kg)
Number of Discs (center)	32
Number of Discs (per-wing)	31

# PRO-TILL<sup>®</sup> | 30/36/41/45

HIGH PERFORMANCE TILLAGE



## SPECIFICATIONS

Model	PTL30	PTL36
Transport Height (Low c/w Rubber Roller)	3.9 m	4.08 m
Transport Width (Low Position)	4.47 m	4.47 m
Weight (c/w rubber roller, scraper & 20" discs)	12,473 kg	14,288 kg
Hitch Weight	3,175 kg	4,082 kg
Number of Discs (center)	24	24
Number of Discs (per wing)	23	31


Model	PTL41	PTL45
Transport Height (Low c/w Rubber Roller)	4.11 m	4.16 m
Transport Width (Low Position)	5.3 m	5.3 m
Weight (c/w rubber roller, scraper & 20" discs)	17,145 kg	17,916 kg
Hitch Weight	4,762 kg	5,170 kg
Number of Discs (center)	32	32
Number of Discs (per wing)	33	37

## Next Generation, High Performance Tillage

Featuring a narrower transport size, True Greaseless Technology throughout the entire machine, and added versatility with the optional Pro-Cast Precision Granular applicators.

The Pro-Till High Speed, High Performance Disc gets you in the field fast, and allows you to get your work done quickly and efficiently.

WATCH THE VIDEOS ON



# LANDROLLER


## Flattens The Ground - Pounds The Stones In

Available in sizes from 6 m to 24 m, a Degelman Land Roller provides excellent packing pressure and smooth operating which offers combine protection by flattening the fields and pounding the stones in. This makes it possible to harvest peas, lentils, and beans quickly and efficiently. The LR Series offers a 91 cm drum and the Hy-Roller series offers both 91 cm and 106 cm.



### Diameter vs PSI Comparison


A smaller diameter 91 cm drum, since it has less surface area, will provide more downward packing pressure per foot. In areas that are traditionally more minimum till to no-till, this extra packing pressure will handle stones and level the field more consistently. For areas that are more aggressively tilled, and hay land, a 106 cm provides less packing pressure per foot, but makes up for it with a heavier drum.

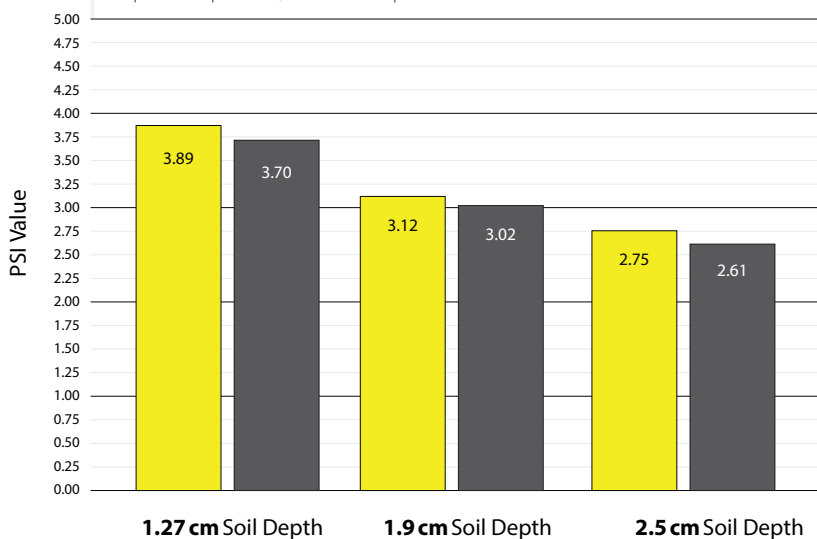

91 cm Diameter 106 cm Diameter

### True Drum Overlap

Drum overlap has to be done right. Competitors will try to disguise overlap with small secondary drums causing unequal pressure, unnecessary complexity, and moving parts and bearings. Degelman drum overlap is simple and built into one heavy design.



WATCH THE VIDEOS ON



## FIVE-PLEX 64/80



Available in **20 m** and **24 m** models, these units are extreme duty, with no maintenance required. These five-plex rollers contour like never before, allowing you to cover a lot of ground, worry-free. Degelman landrollers are some of the heaviest, most reliable available. Ideally used for peas, beans and lentils, they also prepare the perfect bed for haying, grasses and silage.

## TRI-PLEX 34/45/51



Degelman landrollers not only decrease downtime and fuel costs, they also provide optimal seed to soil contact while reducing weeds and moisture loss. Level land allows cutter bars to safely access the base of plants without the risk of rock ingestion. This allows for a faster, safer and easier harvest which ultimately translates to a increased yield on pulse crops such as beans and cereals. The newly designed HAMEC end wheels make unfolding the landroller easier than ever.

## SINGLE DRUM ROLLER



This landroller was specially designed for specialty crop producers who find our standard rollers too large for their farming operation. With hydraulic fold capabilities, it easily transforms to a narrow **2.4 m** transport width, making this machine safe and simple to transport. It's **91 cm** diameter drum incorporates the same heavy duty features as our Tri-Plex rollers such as heavy duty cylinders, oversized shafts and long life bearings.

## SPECIFICATIONS

	Single Drum	3-Plex				5-Plex	
Model	LR2036	LR7634	LR7645	LR7651	LR8064	LR8080	
Segments	1	3	3	3	5	5	
Drum Width Configuration	6 m	3.5 m   3.5 m   3.5 m	5.18 m   3.5 m   5.18 m	6 m   3.5 m   6 m	2 x 3.9 m   4.5 m   2 x 3.9 m	2 x 5.18 m   4.5 m   2 x 5.18 m	
Working Width	6 m	10m	13.7 m	15.5 m	20 m	24 m	
Drum Diameter	91 cm	91 cm	91 cm	91 cm	91 cm	91 cm	
Drum Overlap	10 cm - 7 cm	20 cm	10-7 / 20 cm	10-7 / 20 cm	15 & 29 cm	15 & 29 cm	
Transport Length	257.8 m'-10"	11.12 m	12.8 m	13.7 m	15.69 m	18.13 m	
Transport Width	2.4 m	4.8 m	4.8m	4.8m	4.8m	4.8m	
Transport Height	1.5 m	1.5 m	1.5 m	1.5 m	2.08 m	2.08 m	
Working Weight	3,556 kg	5,531 kg	7,589 kg	8,167 kg	13,005 kg	15,060 kg	
Weight Per Ft	177 kg	162 kg	168 kg	160 kg	203 kg	188 kg	
Transport Hitch Weight	251 kg		215 kg	124 kg	319 kg	260 kg	
Autofold (transport to field)	Hydraulic	Back Up	Back Up HAMEC Assist	Back Up HAMEC Assist	Back Up with Hydraulic Assist	Back Up with Hydraulic Assist	
Autofold (field to transport)	Hydraulic	Drive Forward	Drive Forward	Drive Forward	Drive Forward	Drive Forward	

**Degelman**

**MUDDY RIVER**


# HY-ROLLER



With a new Narrow Transport folding system, the Hy-Roller is offers the choice of either 41 cm or 106 cm drums to fit your farming operation. The Degelman Hy-Roller is simple, robust, and designed with a "Drop the Pin and Go" mentality. True Greaseless Technology will get you in the field earlier and keep you there longer."




## Quick Fold - Narrow Transport System

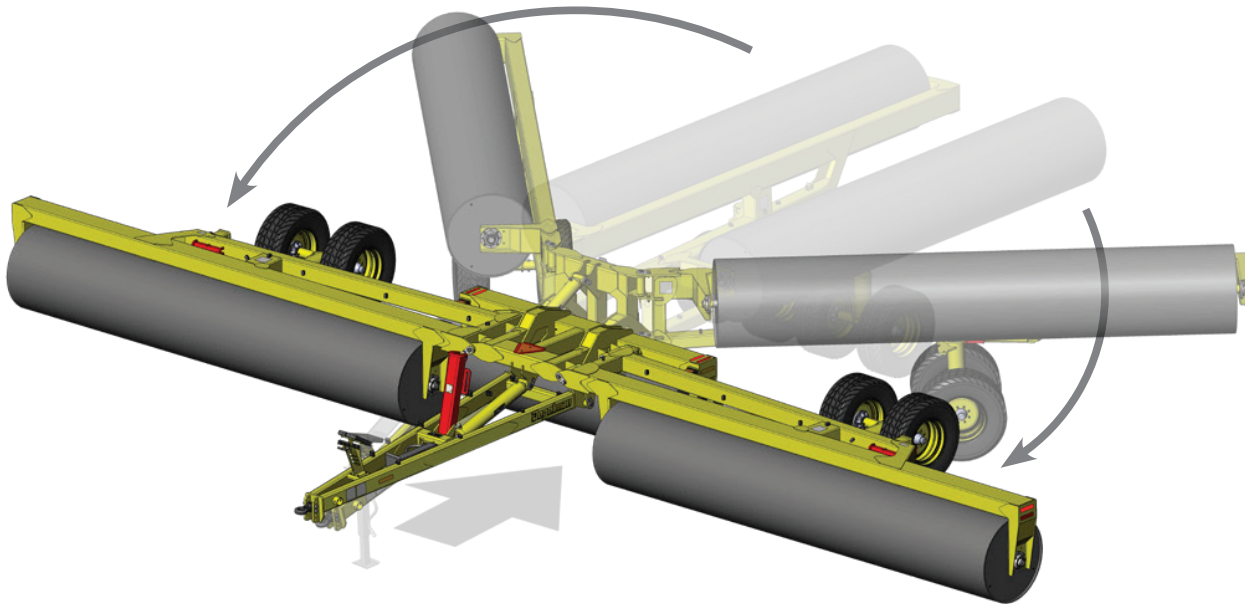

Quick fold/unfold operation while backing up (achieved within length of machine).

WATCH THE VIDEOS ON 





## The Added Benefits of the Hy-Roller

- Maintenance Free
- Narrow Transport
- Extreme Duty Robust Frame
- Choice of 91 cm or 106 cm Drum
- Articulated Hitch
- 2 Inch Pro-Till Style Hinge (No Cross Joints)
- Fully Hydraulic: Hitch Float, End Wheel Turning, Field/Transport
- Reduced Wear Points (No Truss, Swing Arms, Latches, and Cross Joints)
- Rigid Frame Makes for Easy Towing



### SPECIFICATIONS

Model	HY-Roller 41	HY-Roller XL 41	HY-Roller 46	HY-Roller XL 46	HY-Roller 51	HY-Roller XL 51
Drum Configuration	4.69 m 3.35 m 4.69 m	4.69 m 3.35 m 4.69 m	5.46 m 3.35 m 5.46 m	5.46 m 3.35 m 5.46 m	6.22 m 3.35 m 6.22 m	6.22 m 3.35 m 6.22 m
Working Width	12.5m	12.5 m	14 m	14 m	15.5 m	15.5 m
Drum Diameter	91 cm	106 cm	91 cm	106 cm	91 cm	106 cm
Drum Overlap	12.7 cm	12.7 cm	12.7 cm	12.7 cm	12.7 cm	12.7 cm
Transport Length	10.8 m	10.8 m	11.5 m	11.5 m	12.34 m	12.34 m
Transport Width	3.7 m	3.8 m	3.7 m	3.8 m	3.7 m	3.8 m
Transport Height	2.4 m	2.5 m	2.4 m	2.5 m	2.4 m	2.5 m
Working Weight	8,189 kg (@0.500"W)	9,464 kg (@0.500"W)	8,661 kg (@0.500"W)	10,048 kg (@0.500"W)	9,149 kg (@0.500"W)	10,621 kg (@0.500"W)
Weight Per Foot	199 kg	230 kg	188 kg	218 kg	179 kg	208 kg
Transport Hitch Weight	1900 kg (@0.500"W)	2154 kg (@0.500"W)	1762 kg (@0.500"W)	1982 kg (@0.500"W)	1583 kg (@0.500"W)	1755 kg (@0.500"W)
Autofold Transport to Field	Back up with Hydraulic Assist	Back up with Hydraulic Assist	Back up with Hydraulic Assist	Back up with Hydraulic Assist	Back up with Hydraulic Assist	Back up with Hydraulic Assist
Autofold - Field to Transport	Drive Forward	Drive Forward	Drive Forward	Drive Forward	Drive Forward	Drive Forward

**Degelman**

**Muddy River**



**WATCH THE VIDEOS ON** 



# MANURE SPREADERS


How do you build the best manure spreader in the world? Start with Degelman, renowned for engineering tough, high performance equipment for over 60 years. The design is unmistakably Degelman. From the ground up, these machines have been designed with rocks in mind, from its proprietary retractable free-swing flails, super duty gearbox, smooth sidewalls and heavy-duty frame to its clean gate opening. Available in 2 sizes, the M28 and M34 manure spreaders are designed to handle anything you can load in it.



For the most part, all spreaders in the world

employ beaters made from some variation of a helical or auger shape. This rigid design is always vulnerable to rock damage and high maintenance costs. The Degelman Rock Bypass System and Hammerhead Paddles are the heart of the M series manure spreaders. Five rows of free-swing flails, not only collapse upon stone impact, but will exceed expectations for throw distance, durability and even distribution pattern.

Degelman manure spreaders cut and tear material, drop heavier crumbled material to the next lower set of paddles for final processing and discharges material over 18 m.



## Superior Distribution Pattern

Distribution and throw distance is unrivaled with Degelman. Fine pulverized material is spread over 18 m with secondary field passes normally not required. Hydraulic Push Off systems, however, compress manure as it is unloaded. This compression rate changes as less material is available for offloading resulting in inconsistent field distribution patterns.

Commercial operators have long known that a good chain floor drag system will spread material more evenly and is more reliable. These machines pull the material to the beaters with dual 3/4" pre-stretched 45,359 kg breaking strength marine grade drag chain and the Degelman RBS takes care of the rest.




WATCH THE VIDEOS ON 



# ROCK REMOVAL

## Providing Relentless Stone Work For 60 Years

Degelman Industries offers an entire line of rock removal equipment that is designed to not only provide relentless heavy stone work day in and day out, but also clear your fields to make seeding and harvest time faster and more efficient.



### Super Picker III



The legend returns. The original Super Picker was designed for farmers with serious rock problems on their farm. Taking what we've learned from over 60 years of rock picker design and manufacturing, we are excited to introduce the sequel you've been waiting for – Super Picker III.

With a 1.9 m working width and a 2.1 m dump height, you'll pick more rocks for longer periods with less trips to the rock pile.

### SPECIFICATIONS

Model	SP7800
Working Width	4.9 m
Grill Width	1.9 m
Transport Width	39 m
Horsepower (min)	150 hp
Hopper Capacity	2.8 m <sup>3</sup>
Weight	4,799 kg
Hitch Weight	471 kg
Height - Empty	2.4 m
Height - Unloading	2.13 m
Drive	Hydraulic

**Degelman**

**MUDDY RIVER**



**signature** ROCK PICKER<sup>®</sup>  
*Ed J. Degelman*



The Degelman Signature series rock pickers are the result of almost 60 years of pursuing excellence. Degelman Signature Series are unrivaled for performance and durability. Featuring superior rock and soil separation, a heavy reel spring design and a robust frame. Our attention to detail means these machines will work flawlessly for years to come, as you will commonly find Degelman rock pickers made decades ago still working today. Our standard hydraulic long hitch pole is allowed to pivot, providing a large working envelope, superb visibility for picking rocks and the ability to tuck the picker behind the tractor for narrow transport.

### Spring Styles



6000 Series  
Tension Spring



7200 Series  
Compression Spring

### Options

#### Extra Long Hitch Pole

The extra long hitch pole option is a 4.5m pole that is useful for tractors with larger tires and fenders.




#### Large High Flotation Tires

These large diameter 550/45 - 22.5 tires disperse the weight of rocks in the hopper and minimize the pounds per square foot. This can reduce the possibility of heavy rutting.



### SPECIFICATIONS

Model	Signature 6000	Signature 7200
Working Width	3.5 m	4.2 m
Grill Width	1.5 m	1.8 m
Transport Width	2.9 m	3.3 m
Horsepower	70-150 hp	70-180 hp
Hopper Capacity	1.5 m <sup>3</sup>	2.4 m <sup>3</sup>
Weight	2,131 kg	2,880 kg
Hitch Weight	340 kg	385 kg
Reel Spring	Tension	Compression
Length		4.2 - 4.8 m
Height - Empty		1.9 m
Height - Unloading		.91 m



**WATCH THE VIDEOS ON**

# ROCK KING 9600



The King is here. Degelman introduces its largest rock picker ever. With an incredible **2.4 m** wide grate, **3.8 m<sup>3</sup>** cubic yard bucket and **2.2 m** dump height, the Degelman Rock King is simply second to none. With **76 cm** of clearance between the paddle assembly and the grill, large stones are easily picked. These machines are designed to provide relentless heavy stone work day in and day out.

## Huge Bucket Capacity

With a **3.8 m<sup>3</sup>** yard bucket and an **2.4 m** wide grate, Degelman Rock King lets you spend less time at the rock pile and more time at picking.



## Round Solid Steel Grill

The grill teeth on the Rock King are made of round solid **5 cm** diameter C1045 steel shafts. This steel is much stronger than ordinary mild steel and has a natural spring to it to resist impact damage. A Degelman grill is extra heavy, developed with the optimum sweeps and curves to separate rocks from dirt. Every third tooth is welded to the frame to allow small lodged rocks to clear freely. The round profile itself is also the optimum shape with the smallest choke point to minimize jams.

## High Dump

Keep your rock pile tidy. The Rock King's imposing **2.2 m** dump height lets you pile higher than ever before.



## Precision Grill Control

The wheel placement created between the tractor hitch and the offset tires provides precise reactive control over grill depth, exceptionally important when working in soft and/or wet field conditions.



## SPECIFICATIONS

Model	RK9600
Working Width	5.6 m
Grill Width	2.4 m
Transport Width	4.7 m
Horsepower (min)	200 hp
Hopper Capacity	3.8 m <sup>3</sup>
Weight	6,939 kg
Hitch Weight	689 kg
Length	7.1 m
Height - Empty	2.5 m
Height - Unloading	2.2 m
Drive	Hydraulic

**Degelman**

**Muddy River**

## rock rake



### SPECIFICATIONS

Model	RR1500
Width	42m
Length	5.4 m
Transport Width	2.2 m
Transport Length	5.7 m
Weight	1,651 kg
Hitch Weight	215 kg
Horsepower (min)	75 hp

### Windrowing Rock

The 4.2 m wide spiral drum rakes a large swath of rocks from the field with each pass, yet the entire machine folds into a 2.2 m narrow transport width with 25 cm of ground clearance.

## rock digger



### SPECIFICATIONS

Model	RD320
Width	2.5 m
Transport Length	4 m
Weight	1,088 kg
Hitch Weight	108 kg
Digging Depth	80 cm
Horsepower (max)	250 hp

### Hard Surfaced Digging Teeth

The Degelman RD320 is a trouble-free and versatile machine that has been used for years by professional landscapers, contractors and farmers. The RD320 is designed to dig out submerged rocks and grab, lift, and transport boulders.

## prong picker




### SPECIFICATIONS

Model	R570P
Width	3.1 m
Length	4.4 m
Transport Width	2.6 m
Weight	1,170 kg
Hitch Weight	136 kg
Horsepower (min)	75 hp

### Clear Big Stones

The R570P Prong Rock Picker has tremendous strength for a small machine. This fork-type rock picker is ideal for picking anything from a two pound stone to a 1,360 kg boulder.




WATCH THE VIDEOS ON 

# BULLDOZER BLADES

## Engineered Tough with an Intelligent Design

No two tractor manufacturers are alike, so we don't develop a blade that is "one size fits all." Degelman engineers, designs and individually builds all Bulldozer Tractor fit-ups to ensure proper mounting locations are the best spot to push from - protecting your tractor investment. Featuring a precision machined tubing finish,

superior seals and high grade wear bands, the Degelman series of bulldozer blades adds value and versatility to your tractor.




Scan for more info




## USE OUR BUILD A BLADE FEATURE TO QUICKLY FIND THE RIGHT FIT-UP FOR YOUR TRACTOR

With over 450 different combinations of tractor manufacturers and blades available, the Degelman build-a-blade tool is an easy and efficient way to find which blade is right for your tractor. Follow the steps below to build yours today.



Scan to Build Your Blade




1. Visit Degelman.com
2. Click on "Build & Price"
3. Click on "Bulldozer Blades"
4. Choose your tractor
5. Select your blade
6. Choose width, options, and accessories
7. Save your build ID to view this build again
8. As you scroll, you will see mounting times, part numbers, and prices.
9. You can print, save, and email the selected blade, as well as view the total price and photos of the selected blade.

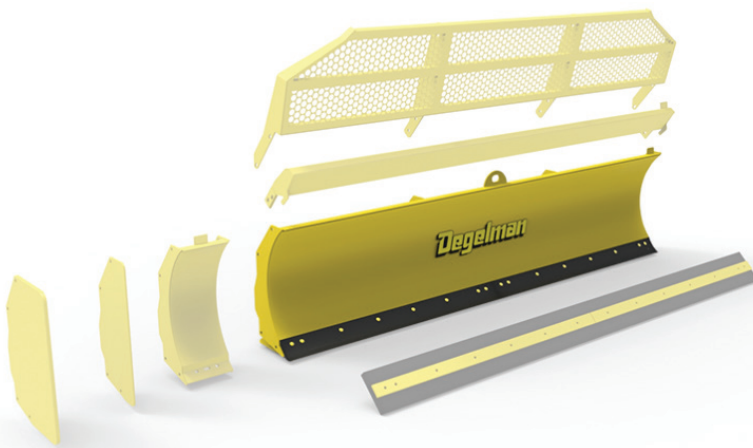




WATCH THE VIDEOS ON







### 3500 Series







### 4600/5700 Series







### 5900 Series









### 66/69/7200 Series



### 7900 Series



# SILAGE KING

 <p>190cm</p>	 <p>4WD 300 - 700 hp</p>		<p><b>LIFT HEIGHT*</b></p>  <p>angle: 152 cm no angle: 127 cm</p>	<p><b>APPROACH ANGLE</b></p>  <p>25°</p>
 <p>Hydraulic Lift, Angle, Tilt</p>				



## It's Good to be King

The Silage King is built on the same rock-solid foundation that Degelman is known for, and includes features that will significantly improve how you push silage. With our new streamlined design, this blade pushes silage with less horsepower, while maximizing the approach angle - allowing you to push the silage up where it belongs.


## Designed for Silage

The Silage King with silage extension comes in at 190 cm tall - the tallest dozer blade in the industry. The curvature has been slightly flattened out from the 7900 in order to prevent the blade from holding on to excess material, allowing for even distribution. With more height, and less curvature, you can push more silage with less horsepower.

## Reduced Overhang for Better Control

In order to give the operator more control, we've moved the blade 48 cm closer to the tractor. This reduced overhang improves control while keeping the blade at the ideal

## Degelman's Radial Lift Approach

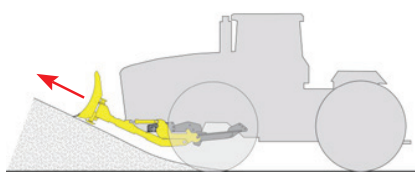


When an adjustment needs to be made by the operator, fast blade response time is necessary. The Degelman Silage King is mounted with only one pivot point, making the response time as quick as possible. This radial lift design makes it easier to push, carrying loads **UP** the pile, rather than **INTO** the pile.




## What is Quick Attach D-LOCK Mounting?

The D-LOCK® mounting system offers the convenience of quick attach/detach as well as long life. No tools are required. Fit-ups are 100% secure with zero movement. The blade can be removed in minutes by disengaging two points on the front axle brackets.

- Step 1:** Remove clip pin. Insert handle in slot 1.
- Step 2:** Rotate to position 1


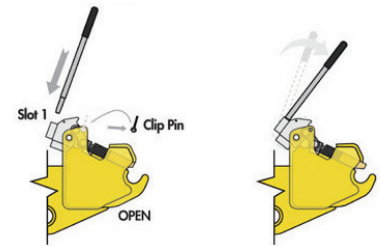


- Step 3:** Remove handle. Re-insert in slot 2
- Step 4:** Rotate up to position 2. Remove handle & Store. Re-install clip pin.

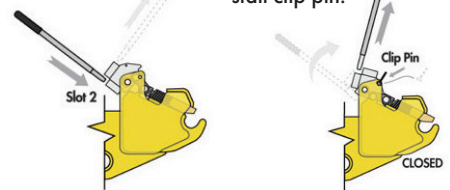

## What is HQT? (Hydraulic Quick-Tach)

In the spirit of safety and simplicity, Degelman has pushed the design process one more time by coming up with the all new HQT-Hydraulic Quick-Tach System. This precision built feature utilizes a hydraulic pin engagement concept which allows the operator to secure the blade to the Dozer mounting framework from the tractor seat. It avoids the dangers, awkwardness and hassles of crawling around the tractor to secure the dozer engagement.

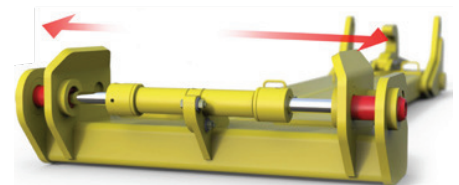

# TRUGRADE



## SPECIFICATIONS

Blade Width	4.8m
Blade Height	86 cm
Weight	2,952 kg
Concrete Weight	4,086 kg
Blade Clearance	785 cm
Transport Width	2.5 m
Transport Length	7.3 m
Hydraulic Angle	37° - 40°
Hydraulic Tilt	15°
Reversible Cutting Edge	1.5 cm x 15 cm
True Greaseless Technology	Standard
Flip Over End Plates	Standard

Introducing the Degelman TruGrade, the tallest pull type bulldozer blade on the market. Our streamlined design will make cleaning ditches, grading roads, digging ditches, leveling fields, and moving snow easier and more efficient than ever.

The TruGrade design concept has a hydraulic angle capability of 37°-40°. This allows the angle to stay the same no matter the frame offset. Our unique Continuous Angle System ensures the angle of the blade will always be the same in respect to the axle of the machine and tractor.

## SNOW REMOVAL

### *strongbox*

The Degelman Strongbox is a simple, strong and effective tool for high volume snow removal. The unique design of the cone gusset provides a self-cleaning surface to prevent snow and ice from accumulating while increasing structural support to the side plates.



### *speedblade*

Degelman's Speedblade is designed so you can hydraulically open the blade to its maximum width of 4.5 m for small and large snow drifts or fold the wings in to move and contain high volumes of snow. And with the option to hydraulically put the wings at whatever angle you want, you can change the width as you go depending on snow fall and how much room you have to maneuver.



**Degelman**

**MUDDY RIVER**

# HDSR

## HEAVY DUTY STAGGERED RIPPER

HDSR line of Heavy Duty Staggered Rippers from Degelman. When your operation needs something more than conventional tillage, look no further. The HDSR offers aggressive, industry leading **60 cm** maximum ripping depth. With the under frame clearance of **1.14 m**, there's plenty of room for crop residue and rocks to pass through the machine, and makes changing points easier and safer.



True Greaseless Technology  
Simple & Effective Depth Control  
Auto Levelling System- Drop the pin and go  
Narrow Transport  
Optional Cage Roller

Configure the Degelman HDSR Staggered Ripper to meet your operation's needs:

### 3 Shank Options

- 3.17 cm thick parabolic shank for aggressive tillage
- 3.17 cm straight shank for minimum residue disturbance with excellent subsoil tillage
- 1.9 cm no-till shank for a surprisingly undisturbed surface while effectively shattering subsoil compaction

All shanks are constructed from AR400 steel for maximum strength and wear resistance.

### 3 Shank Trip Options

- Shear bolt trip is available for producers with loose, sandy soil and few rocks
- Auto-reset spring trip comes standard for fields with loose soil and many rocks
- Hydraulic trip is available for the most punishing conditions of hard soil and numerous rocks

### Trip Force (Point Load)

Shear Bolt Trip

- 1,270 kg

Spring Trip (standard)

- 1,315 kg

Hydraulic Trip

- Adjustable from 1,360 kg to 2,267 kg

### Wide Variety of Ripper Points

Through rigorous testing, our ripper points have been proven in the field to last 3 times longer than the competition.





# HDSR

## HEAVY DUTY STAGGERED RIPPER



### SPECIFICATIONS

Model	HDSR 930	HDSR 1320	HDSR 1130	HDSR 1520
Working Width	6.8m	6.7m	8.3m	7.6m
Transport Height (w/o chopper)	3.65m	3.65m	3.68m	3.68m
Transport Height (with chopper)	4.1m	4.1m	4.2m	4.2m
Transport Width	3.7m	3.7m	3.8m	3.8m
Transport Length	5.3m	5.3m	6m	6m
Field Length (w/o chopper)	7.6m	7.6m	8.4m	8.4m
Field Length (with chopper)	8.2m	8.2m	8.9m	8.9m
Outside Wheel Track	3.2m	3.2m	3.2m	3.2m
Weight (w/o chopper)	8,164 kg	9,298 kg	9,071 kg	10,205 kg
Weight (with chopper)	9,207 kg	10,341 kg	10,205 kg	11,339 kg
Hitch Weight (w/o chopper)	1,270 kg	1,451 kg	1,814 kg	2,086 kg
Hitch Weight (with chopper)	1,451 kg	1,632 kg	2,086 kg	2,313 kg
Number of Shanks	9	13	11	15
Shank Spacing	76 cm	50 cm	76 cm	50 cm
Under Frame Clearance	114 cm	114 cm	114 cm	114 cm
Ripping Depth	15 cm to 60 cm	15 cm to 60 cm	15 cm to 60 cm	15 cm to 60 cm

# HDSR

## HEAVY DUTY STAGGERED RIPPER



Model	HDSR 930/1320	HDSR 1130/1520
Ripping Depth	15 cm - 60 cm	15 cm to 60 cm
Shank Trip Mechanism	Shear Bolt, Spring, or Hydraulic	Shear Bolt, Spring, or Hydraulic
Shank Arm	1.9 cm No Till Straight, 3.17 cm Min Till Straight, 3.17 cm Parabolic	1.9 cm No Till Straight, 3.17 cm Min Till Straight, 3.17 cm Parabolic
Shank Construction	AR400 Steel	AR400 Steel
Points	7.62 Narrow to 35.56 Wing	7.62 Narrow to 35.56 Wing
Optional Coulter Disc	50.8 cm Flat	50.8 cm Flat
Size		
Optional Coulter Arm	Rubber Torsion	Rubber Torsion
Mounting		
Optional Chopper Size	43 cm Diameter X 3.25 m LG	43 cm Diameter X 3.25 m LG
Optional Chopper Down pressure	Spring or Hydraulic	Spring or Hydraulic
Tire Size Center	500/60R22.5	500/60R22.5
Tire Size Wing	400/60R 15.5	400/60R 15.5
Transport Cylinder	15 cm X 101 cm X 6 cm - Pin Eye c/w composite bushings and seals	16.5 cm X 101 cm X 6 cm - Pin Eye c/w composite bushings and seals
Wing Cylinder	10 cm X 50 cm X 5 cm	10 cm X 50 cm X 5 cm
Hydraulic Jack Cylinder	11.5 cm X 20 cm X 5 cm	11.5 cm X 20 cm X 5 cm
Center Wheel Depth	11.5 cm X 40 cm X 5 cm - Pin Eye c/w composite bushings and seals	11.5 cm X 40 cm X 5 cm - Pin Eye c/w composite bushings and seals
Cylinder		
Wing Wheel Depth	7 cm X 10 cm X 3.8 cm - Pin Eye c/w composite bushings and seals	7 cm X 10 cm X 3.8 cm - Pin Eye c/w composite bushings and seals
Cylinder		
Auto-Level Technology	Standard	Standard
Hydraulic Park Jack	Standard	Standard
Safety Lights	Standard	Standard
Hose/Manual Holder	Standard	Standard
Compaction Depth Probe	Standard	Standard

# ENGINEERED TOUGH

Our mission is to inspire generations of employees, customers, dealers, and vendors to create the most innovative agricultural solutions with an exceptional Degelman experience.

## OUR VALUES

**BOLD** - We set the bar for the entire industry by thinking BIG. We make strategic decisions with our resources and identify, plan and seize opportunities.

**INTEGRITY** - We design and build our products to the highest standard and treat people as we expect to be treated in return.

**CREATIVE** - We foster creativity in our employees. We are continually making improvements to better the customer experience at every level.

**COLLABORATION** - Voices matter and we listen. Our teams work jointly with our customers to challenge the industries we serve.

**GENERATIONAL** - We make long term decisions. We solve problems by investing in people and products that form relationships that last for generations.

**IDENTITY** - We know who we are. We employ the best and deliver the best products on the market. Our unique customer experience creates a loyalty that lasts for generations. We've been doing this since 1962, and will continue to stay true to our tradition.

**SIMPLICITY** - We build simplicity into our process and our products. We are extremely resourceful; our goal is to keep it simple and straightforward. We are easy to do business with and we keep our promises.

**PASSION** - Our passion is our fuel. It's what drives us to uphold our values and fulfill our mission. This is the catalyst to delivering an exceptional Degelman experience.



**Degelman**



**MUDDY RIVER**

